

AMAROK IP ANTI-LIGATURE LED

IP65 IK10 CLASS I CE

FEATURES & BENEFITS

- > Anti-ligature, tamper-proof luminaire for plasterboard ceilings
- > Average rated LED life: >60,000hrs (L80/B10)
- > Optimum colour consistency—2 step MacAdam ellipse tolerance
- > High anti-bacterial protection
- > Various sizes: 300 x 600 / 600 x 600 / 300 x 1200 / 600 x 1200
- > Photobiological hazard: RG0



PERFORMANCE



Light source	LED
LED output	4260 - 13932lm
Luminaire output	3205 - 10482lm
Luminaire efficiency	≥123lm/W
CRI	>80
UGR	<19

MATERIALS

Body	Sheet steel
Finish	White
Diffuser	Opal polycarbonate TP(a)
External fixings	Stainless steel M5 screws

OPTIONS

- > 3hr emergency
- > Tuneable white and 3000K
- > Other lumen outputs available
- > Internal fuse and LSOH cable

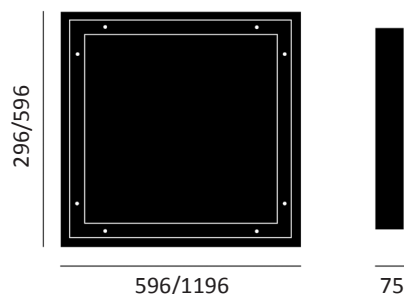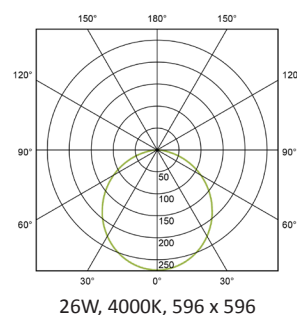

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI
28W	4000K	3494lm	296 x 596	12400101	12400103
26W	4000K	3205lm	596 x 596	12400201	12400203
34W	4000K	4274lm	596 x 596	12400301	12400303
43W	4000K	5342lm	596 x 596	12400401	12400403
56W	4000K	6988lm	596 x 596	12400501	12400503
70W	4000K	8735lm	596 x 596	12400601	12400603
34W	4000K	4274lm	296 x 1196	12400701	12400703
56W	4000K	6988lm	296 x 1196	12400801	12400803
51W	4000K	6410lm	596 x 1196	12400901	12400903
83W	4000K	10482lm	596 x 1196	12401001	12401003