



IP65 IK08 CLASS I CE

# AMAROK IP WALK-OVER LED

An IP65 LED panel luminaire with walk-on capabilities and rear access for easy maintenance and the prevention of dust contamination in the working area below.

Suitable for clean rooms, pharmaceutical and other hygienic environments.

# AMAROK IP WALK-OVER

## FEATURES & BENEFITS

- > Rear access - easy to install and maintain
- > Average rated LED life: 60,000hrs (L80/B10) - maintenance free
- > Optimum colour consistency - 2 step MacAdam ellipse tolerance
- > Lightweight construction
- > High anti-bacterial protection
- > Photobiological hazard: RG0

## PERFORMANCE



Light source	LED
LED output	4047 - 11610lm
Luminaire output	3090 - 7091lm
Luminaire efficiency	≥118lm/W
CRI	>80
UGR	<19

## MATERIALS

Body	Sheet steel
Finish	White
Diffuser	Microprism with hardened matt glass
Wiring	Ø13mm cable entry

## OPTIONS

- > 3hr emergency
- > Tuneable white
- > Other lumen outputs and sizes available
- > Internal fuse and LSOH cable

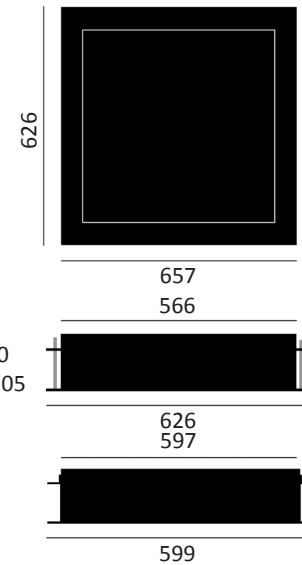

LAMP	COLOUR TEMP	DELIVERED LUMENS	PLASTERBOARD CEILING	
			STANDARD	DALI
26W	3000K	3090lm	12801101	12801103
26W	4000K	3253lm	12801201	12801203
34W	3000K	4120lm	12801301	12801303
34W	4000K	4337lm	12801401	12801403
42W	3000K	5051lm	12801501	12801503
42W	4000K	5319lm	12801601	12801603
56W	3000K	6734lm	12801701	12801703
56W	4000K	7091lm	12801801	12801803