



 IP43 CLASS II CE

AURA LED

A stunning, surface wall or ceiling mounted LED luminaire with a triple layer mouth blown glass diffuser. Available with a matching pendant.

AURA LED


FEATURES & BENEFITS

- > Homogenous light distribution
- > Available in various lumen outputs and sizes for design flexibility
- > Average rated LED life: >67,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance



PERFORMANCE

Light source	LED
LED output	2000 - 4050lm
Luminaire output	1360 - 3000lm
Luminaire efficiency	≥88lm/W
CRI	>80
Beam angle	110°

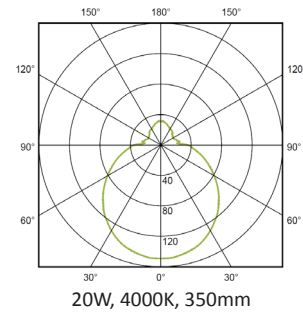


MATERIALS

Body	Sheet steel
Finish	White
Diffuser	Triple layer matt opal glass

OPTIONS

- > Decorative trims
- > Replacement shade
- > Bluetooth enabled
- > Matching pendant
- > Other sizes available $\varnothing 280/\varnothing 490/\varnothing 590$

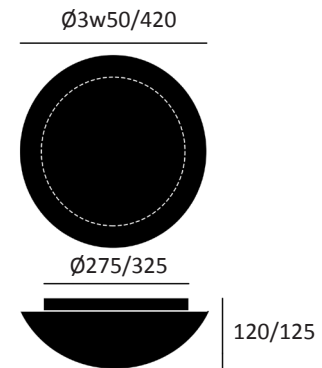

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
15W	3000K	1360lm	Ø350 x 120	43400701	43400703	43400791	43400793
15W	4000K	1430lm	Ø350 x 120	43400801	43400803	43400891	43400893
20W	3000K	1760lm	Ø350 x 120	43400901	43400903	43400991	43400993
20W	4000K	1840lm	Ø350 x 120	43401001	43401003	43401091	43401093
21W	3000K	2050lm	Ø420 x 125	43401101	43401103	43401191	43401193
21W	4000K	2160lm	Ø420 x 125	43401201	43401203	43401291	43401293
29W	3000K	2870lm	Ø420 x 125	43401301	43401303	43401391	43401393
29W	4000K	3000lm	Ø420 x 125	43401401	43401403	43401491	43401493