

AVALON BOLLARD LED

IP65

CLASS I

CE

FEATURES & BENEFITS

- > High resistance to UV and oxidation
- > Shock resistant glass diffuser
- > Average rated LED life: >50,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance
- > Complementary recessed/surface wall luminaire




PERFORMANCE

Light source	LED
Luminaire output	410 - 1340lm
CRI	>80


MATERIALS

Body	Die-cast aluminium EN AB 44100 head with extruded aluminium base (EN AW 6060)
Finish	Polyester powder coated Anthracite grey / Light grey
Diffuser	Microprism with 4mm soda-lime tempered glass with sealing gasket
External fixings	Stainless steel A4-70 treated with water repellent lubricating solution.
Wiring	Ø10/14 mm silicone cable gland

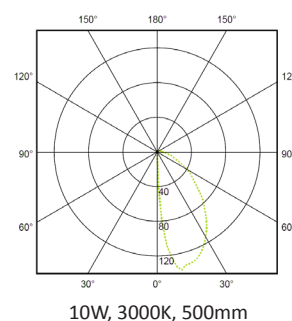

OPTIONS

- > IP68 connector and through wiring connector
- > DALI on request
- > Steel plated anchorage unit

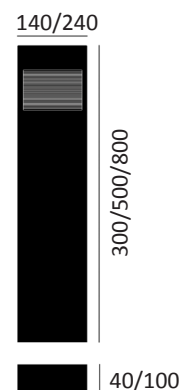

LAMP	COLOUR TEMP	LUMENS	DIMENSIONS	ANTHRACITE GREY	LIGHT GREY
3.5W	3000K	410lm	300 x 140 x 40	71710001	71710101
3.5W	4000K	450lm	300 x 140 x 40	71710201	71710301
3.5W	3000K	410lm	500 x 140 x 40	71710401	71710501
3.5W	4000K	450lm	500 x 140 x 40	71710601	71710701
10W	3000K	1220lm	500 x 240 x 100	71710801	71710901
10W	4000K	1340lm	500 x 240 x 100	71711001	71711101
10W	3000K	1220lm	800 x 240 x 100	71711201	71711301
10W	4000K	1340lm	800 x 240 x 100	71711401	71711501