

BARI MICRO LED

IP65

CLASS
I

C E

A high efficiency, compact IP65 LED downlight designed for lighting humid areas such as bathrooms, changing rooms and entrances.

FEATURES & BENEFITS

- > Long average LED life: >50,000hrs (L80/B20)
- > Lamp lumen maintenance factor after 60,000hrs: 80%
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance

PERFORMANCE


Light source	LED COB
LED output	1400lm
Luminaire output	1170 - 1240lm
Luminaire efficiency	≥89lm/W
CRI	>80
Beam angle	45°

MATERIALS

Body	Die-cast aluminium
Finish	White (RAL 9010)
Diffuser	Clear tempered glass
Reflector	Faceted aluminium
Cut out	Ø72mm

OPTIONS

- > 3hr maintained emergency
- > Other RAL colours on request
- > Internal fuse and LSOH cables

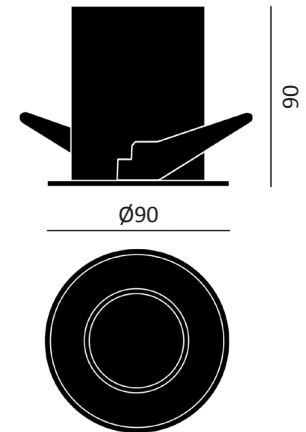

LAMP	COLOUR TEMP	DELIVERED LUMENS	STANDARD	DALI	EMERGENCY STANDARD	
					STANDARD	DALI
14W	3000K	1170lm	31201901	31201903	31201991	31201993
14W	4000K	1240lm	31202001	31202003	31202091	31202093