



IP65 IP44 IP20 CLASS I CE

BARI LED

A high performance, reliable LED downlight with excellent technical parameters. Ideal for hotels, reception areas, restaurants as well as public and commercial buildings.

BARI LED


FEATURES & BENEFITS

- > High efficiency, multi-purpose LED downlight
- > 20 degree adjustable tilt
- > Long average LED life: >60,000hrs (L90/B10)
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance



PERFORMANCE

Light source	LED
LED output	1990 - 2830lm (adjustable) 1990 - 3800lm (fixed)
Luminaire output	1610 - 2220lm (adjustable) 1670 - 3220lm (fixed)
Luminaire efficiency	≥100lm/W (adjustable) / ≥110lm/W (fixed)
CRI	>80
Beam angle	45° / 50° / 55°

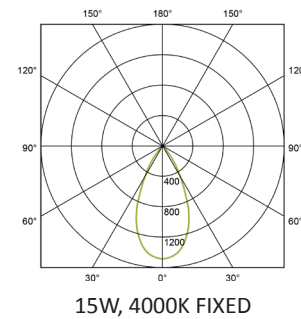


MATERIALS

Body	Die-cast aluminium
Finish	White (RAL 9010)
Diffuser	Clear tempered glass

OPTIONS

- > Other RAL colours
- > 2-step MacAdam, CRI>90
- > Matt anodised reflector
- > Internal fuse and LSOH cables

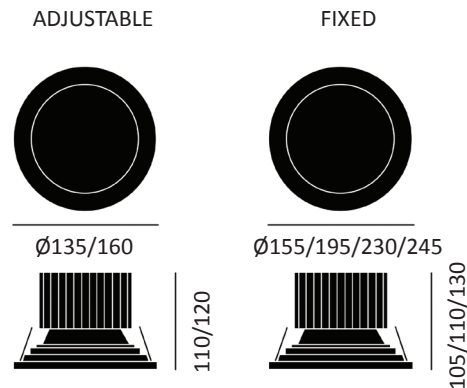

ADJUSTABLE (IP20)

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	DIMENSIONS	STANDARD	DALI	EMERGENCY	
							STANDARD	DALI
15W	3000K	1610lm	55°	Ø135 x 110	30606001	30606003	30606091	30606093
15W	4000K	1660lm	55°	Ø135 x 110	30606101	30606103	30606191	30606193
21W	3000K	2220lm	55°	Ø135 x 110	30606201	30606203	30606291	30606293
21W	4000K	2290lm	55°	Ø135 x 110	30606301	30606303	30606391	30606393
15W	3000K	1530lm	45°	Ø160 x 120	30606401	30606403	30606491	30606493
15W	4000K	1580lm	45°	Ø160 x 120	30606501	30606503	30606591	30606593
21W	3000K	2110lm	45°	Ø160 x 120	30606601	30606603	30606691	30606693
21W	4000K	2180lm	45°	Ø160 x 120	30606701	30606703	30606791	30606793

BARI LED

FIXED (IP44)

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	DIMENSIONS	STANDARD	DALI	EMERGENCY	
							STANDARD	DALI
15W	3000K	1670lm	45°	Ø155 x 105	30606801	30606803	30606891	30606893
15W	4000K	1720lm	45°	Ø155 x 105	30606901	30606903	30606991	30606993
21W	3000K	2300lm	45°	Ø155 x 105	30607001	30607003	30607091	30607093
21W	4000K	2370lm	45°	Ø155 x 105	30607101	30607103	30607191	30607193
15W	3000K	1710lm	55°	Ø195 x 110	30607201	30607203	30607291	30607293
15W	4000K	1760lm	55°	Ø195 x 110	30607301	30607303	30607391	30607393
21W	3000K	2360lm	55°	Ø195 x 110	30607401	30607403	30607491	30607493
21W	4000K	2430lm	55°	Ø195 x 110	30607501	30607503	30607591	30607593
29W	3000K	3170lm	55°	Ø195 x 110	30607601	30607603	30607691	30607693
29W	4000K	3260lm	55°	Ø195 x 110	30607701	30607703	30607791	30607793
15W	3000K	1690lm	50°	Ø230 x 110	30607801	30607803	30607891	30607893
15W	4000K	1740lm	50°	Ø230 x 110	30607901	30607903	30607991	30607993
21W	3000K	2330lm	50°	Ø230 x 110	30608001	30608003	30608091	30608093
21W	4000K	2400lm	50°	Ø230 x 110	30608101	30608103	30608191	30608193
29W	3000K	3130lm	50°	Ø230 x 110	30608201	30608203	30608291	30608293
29W	4000K	3220lm	50°	Ø230 x 110	30608301	30608303	30608391	30608393

FIXED (IP65)

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	DIMENSIONS	STANDARD	DALI	EMERGENCY	
							STANDARD	DALI
15W	3000K	1670lm	50°	Ø245 x 130	30608401	30608403	30608491	30608493
15W	4000K	1720lm	50°	Ø245 x 130	30608501	30608503	30608591	30608593
21W	3000K	2300lm	50°	Ø245 x 130	30608601	30608603	30608691	30608693
21W	4000K	2380lm	50°	Ø245 x 130	30608701	30608703	30608791	30608793
29W	3000K	3090lm	50°	Ø245 x 130	30608801	30608803	30608891	30608893
29W	4000K	3190lm	50°	Ø245 x 130	30608901	30608903	30608991	30608993