

BARI MINI LED

IP44 CLASS I CE


FEATURES & BENEFITS

- > High efficiency, multi-purpose LED downlight
- > Long average LED life: >56,000hrs LED life (L90/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance



PERFORMANCE

Light source	LED
LED output	1240 - 1700lm
Luminaire output	1000 - 1550lm
Luminaire efficiency	≥118lm/W
CRI	80
Beam angle	20° / 30° / 50°




13W, 4000K

MATERIALS

Body	Die-cast aluminium
Finish	White
Diffuser	Clear tempered glass
Cut out	Ø110

OPTIONS

- > 3hr emergency
- > Other RAL colours
- > Internal fuse and LSOH cables

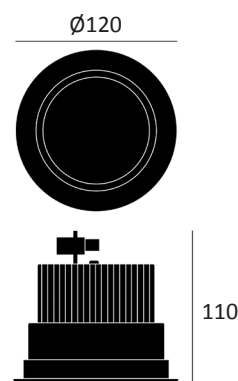

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
8W	3000K	950lm	20	31200701	31200703	31200791	31200793
8W	4000K	1000lm	20	31200801	31200803	31200891	31200893
8W	3000K	1000lm	30	31200901	31200903	31200991	31200993
8W	4000K	1050lm	30	31201001	31201003	31201091	31201093
8W	3000K	1000lm	50	31201101	31201103	31201191	31201193
8W	4000K	1050lm	50	31201201	31201203	31201291	31201293
13W	3000K	1400lm	20	31201301	31201303	31201391	31201393
13W	4000K	1470lm	20	31201401	31201403	31201491	31201493
13W	3000K	1480lm	30	31201501	31201503	31201591	31201593
13W	4000K	1550lm	30	31201601	31201603	31201691	31201693
13W	3000K	1480lm	50	31201701	31201703	31201791	31201793
13W	4000K	1550lm	50	31201801	31201803	31201891	31201893