

# BARI SQUARE LED

IP44 CLASS I CE

A high performance, reliable square LED downlight with excellent technical parameters. Ideal for hotels, reception areas, restaurants as well as public and commercial buildings.

## FEATURES & BENEFITS



- > High efficiency, multi-purpose LED downlight
- > Installation in plasterboard and modular ceilings
- > Long average rated LED life: >60,000hrs LED life (L90/B10)
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance
- > Cut out: 158x158mm

## PERFORMANCE


Light source	LED
LED output	1970lm - 3820lm
Luminaire output	1460lm - 2830lm
CRI	>80
Beam angle	60°

## MATERIALS

Body	Sheet steel
Bezel	Aluminium
Finish	White (RAL 9010)
Diffuser	Tempered opal glass
Reflector	Polished aluminium 99.85% purity

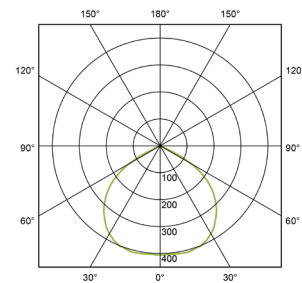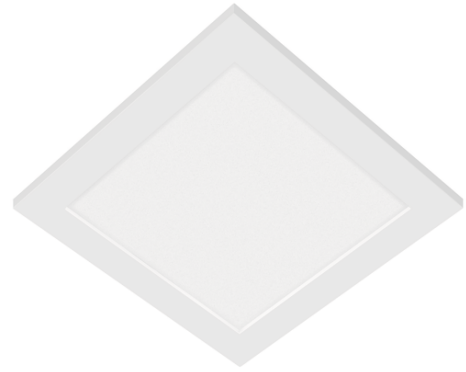

15W, 3000K

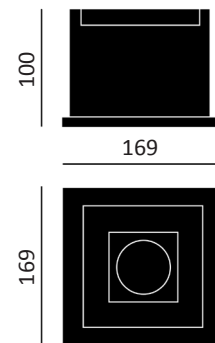

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI	EMERGENCY STANDARD	DALI
15W	3000K	1460lm	169 x 169	32600101	32600103	32600191	32600193
15W	4000K	1500lm	169 x 169	32600201	32600203	32600291	32600293
21W	3000K	2020lm	169 x 169	32600301	32600303	32600391	32600393
21W	4000K	2080lm	169 x 169	32600401	32600403	32600491	32600493
29W	3000K	2750lm	169 x 169	32600501	32600503	32600591	32600593
29W	4000K	2830lm	169 x 169	32600601	32600603	32600691	32600693