

BOLT LED

IP67	CLASS I	CE
------	---------	----

FEATURES & BENEFITS

- > High resistance to UV and oxidation - Suitable for marine environments
- > Excellent heat dissipation
- > Average rated LED life: >50,000hrs (L70/B50)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > Supported load: 2000Kg



PERFORMANCE


Light source	LED COB (Nichia)
Distribution	Symmetric
LED output	280lm
Luminaire output	224lm
CRI	>80
Beam angle	80° each aperture

MATERIALS

Body	Aluminium 6262 (minimum 20µm thickness) Brass MS58
Finish	Grey anodised aluminium / Brass
Diffuser	Clear polycarbonate, minimum 6mm thick, with temperature resistant silicone seal
Mounting	Recessed polycarbonate housing, Ø50mm, 130mm deep

OPTIONS

- > IP68 connector
- > Coloured films
- > CRI>90 on request

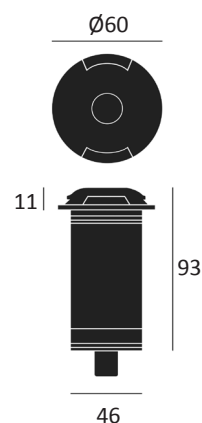

LAMP	COLOUR TEMP	DELIVERED LUMENS	APERTURES	STANDARD DRIVER	
				ALUMINIUM	BRASS
2.1W	3000K	224lm	One	70800401	70800701
2.1W	3000K	224lm	Two	70800501	70800801
2.1W	3000K	224lm	Four	70800601	70800901