



IP40 CLASS I F MARK CE

# CIRCLE LED

A quirky and aesthetic, circular LED luminaire for plasterboard or grid ceilings with a subtle and evenly distributed light beam.

This contemporary luminaire is a perfect choice for corridors, reception areas and meeting rooms.

# CIRCLE LED

## FEATURES & BENEFITS

- > Decorative halo effect
- > Quirky aesthetic design
- > Average rated LED life: >53,000hrs (L90/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > Suitable for exposed 600 x 600 or plasterboard ceilings
- > Photobiological hazard: RG1

## PERFORMANCE



Light source	LED
LED output	4480 - 4650lm
Luminaire output	3110 - 3170lm
Luminaire efficiency	≥115lm/W
CRI	>80

## MATERIALS

Body	Sheet steel
Finish	White
Diffuser	Opal PMMA (850°C glow wire tested)

## OPTIONS

- > 2 step MacAdam, CRI >90
- > Other RAL finishes
- > Internal fuse and LSOH cable

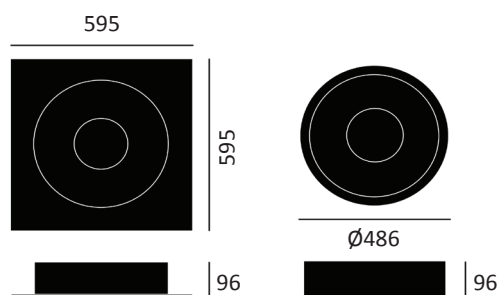

LAMP	COLOUR TEMP	DELIVERED LUMENS	MOUNTING	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
27W	3000K	3110lm	Recessed	11500901	11500903	11500991	11500993
27W	4000K	3170lm	Recessed	11501001	11501003	11501091	11501093
27W	3000K	3110lm	Lay-in	11501101	11501103	11501191	11501193
27W	4000K	3170lm	Lay-in	11501201	11501203	11501291	11501293