

CYLINDER DOUBLE

IP20 CLASS I F MARK CE

A cost-effective, yet high performance, twin spotlight designed for three circuit track mounting.

FEATURES AND BENEFITS

- > Average LED life: >50,000hrs - (L70) - maintenance free
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance

PERFORMANCE



Light source	LED (Bridgelux)
LED output	2 x 1811 - 2 x 1865lm
Luminaire output	2 x 1449 - 2 x 1492lm
CRI	>80
Beam angle	13° / 28° / 48°

MATERIALS

Body	Extruded aluminium
Finish	Silver / White / Black
Reflector	Aluminium coated polycarbonate with protective lacquer
Diffuser	Clear glass

OPTIONS

- > CRI>90
- > Dimming options
- > Surface (wall & ceiling) version

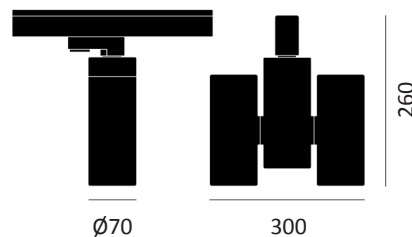

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	SILVER	WHITE	BLACK
2 x 13W	3000K	2 x 1449lm	13°	26201901	26202501	26203101
2 x 13W	4000K	2 x 1492lm	13°	26202001	26202601	26203201
2 X 13W	3000K	2 x 1449lm	28°	26202101	26202701	26203301
2 X 13W	4000K	2 x 1492lm	28°	26202201	26202801	26203401
2 X 13W	3000K	2 x 1449lm	48°	26202301	26202901	26203501
2 X 13W	4000K	2 x 1492lm	48°	26202401	26203001	26203601