

DELIA LED

IP41 IK10 CLASS I CE

SECTION 03: PENDANT

FEATURES & BENEFITS

- > Available in various lumen outputs and sizes
- > Matching surface mounted luminaires available
- > Average rated LED life: >88,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance

PERFORMANCE



Light source	LED (Samsung)
Emission	Direct
LED output	3690 - 7150lm
Luminaire output	2580 - 4720lm
Luminaire efficiency	>89lm/W
CRI	>80

MATERIALS

Body	Sheet steel
Finish	White
Diffuser	Opal PMMA
Mounting	3 wire suspension, length 1 metre

OPTIONS

- > Replacement shade

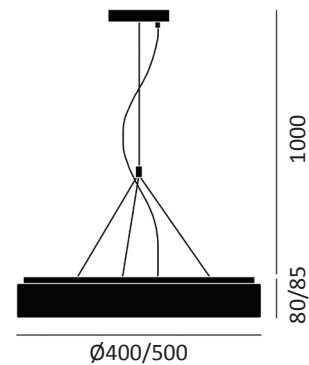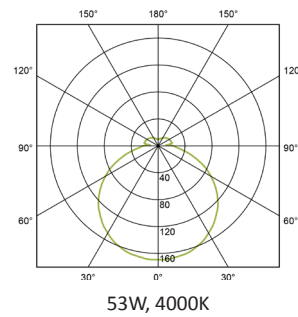

LAMP	COLOUR TEMP	DELIVERED LUMENS	SIZE	STANDARD	DALI
28W	3000K	2580lm	Ø400x80	42103001	42103003
28W	4000K	2720lm	Ø400x80	42103101	42103103
36W	3000K	3400lm	Ø400x80	42103201	42103203
36W	4000K	3550lm	Ø400x80	42103301	42103303
35W	3000K	3140lm	Ø500x85	42103401	42103403
35W	4000K	3310lm	Ø500x85	42103501	42103503
53W	3000K	4470lm	Ø500x85	42103601	42103603
53W	4000K	4720lm	Ø500x85	42103701	42103703