



IP40 IK04 CLASS I CE

DUET LED

A highly stylised, aluminium profile linear LED luminaire that evokes the timeless beauty of the hourglass form.

Its fine design creates an interest and softness while still remaining sleek and contemporary.

DUET LED

FEATURES & BENEFITS

- > Individual or continuous mounting
- > Average rated LED life: >60,000hrs (L80/B10)
- > Optimum colour consistency - 2 step MacAdam chromaticity tolerance

PERFORMANCE



Light source	LED
Emission	Direct & Indirect
LED output	5200 - 14000lm
Luminaire output	4012 - 10801lm
Lumen efficiency	>113lm/W
CRI	>80
Beam angle	Wide

MATERIALS

Body	Aluminium profile
Finish	Anodised aluminium
Diffuser	Microprism (upward), Opal PMMA (downward)
End caps	Black polycarbonate
Mounting	1500mm suspension system

OPTIONS

- > 3hr emergency
- > Grey end caps
- > Longer suspension kit adjustable to 1.6m/3m/6m and joining kit
- > Infill sections
- > Internal fuse and LSOH cables

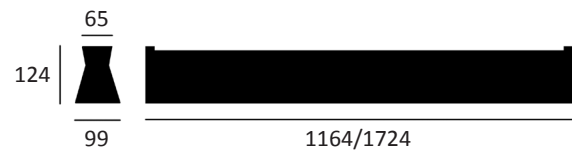

LAMP	COLOUR TEMP	DELIVERED LUMENS	LENGTH	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
45W	3000K	2106lm/1906lm	1164	61702001	61702003	61702091	61702093
43W	4000K	2106lm/1906lm	1164	61702101	61702103	61702191	61702193
61W	3000K	3426lm/2016lm	1164	61702201	61702203	61702291	61702293
59W	4000K	3426lm/2016lm	1164	61702301	61702303	61702391	61702393
90W	3000K	6000lm/2100lm	1724	61702401	61702403	61702491	61702493
88W	4000K	6000lm/2100lm	1724	61702501	61702503	61702591	61702593
122W	3000K	6799lm/4002lm	1724	61702601	61702603	61702691	61702693
118W	4000K	6799lm/4002lm	1724	61702701	61702703	61702791	61702793