

EM3H CURVED ESCAPE LED

IP65

CLASS II

CE

FEATURES & BENEFITS

- > High efficiency LED light source
- > 3hr maintained/non-maintained operation
- > Available with or without hanging blade exit sign
- > 30 metre sign viewing distance
- > Excellent light distribution
- > Fully compliant with EN60698.2.22



PERFORMANCE


Light source	LED (x16)
Supply power	4.2W
Charge power	1.7W
Luminaire output	135lm (5000K)
CRI	>80
Battery	3.6V 1.5Ah NiCd (3hr operation)

MATERIALS

Body	Polycarbonate, white finish
Diffuser	Clear polycarbonate
Wiring	Cable entry in both ends and back plate

OPTIONS

- > Automatic self-test in accordance with BSEN62034
- > ISO legend format
- > Stainless steel version
- > Central battery functionality

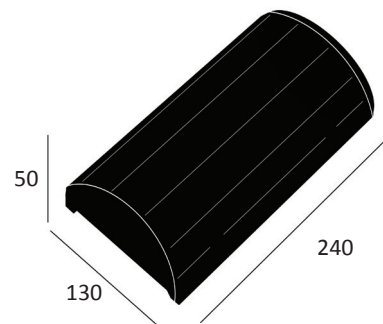

LAMP	LEGEND	STANDARD	DALI
4.2W	None	82900105	82900103
4.2W	Arrow down	82900205	82900203
4.2W	Arrow right	82900305	82900303
4.2W	Arrow left	82900405	82900403