

## EM3H ESCAPE

IP65

CLASS  
II

C E

## FEATURES &amp; BENEFITS

- > High efficiency LED light source
- > Maintained/non-maintained 3hr operation
- > Maintenance-free operation
- > Average rated LED life: >50,000hrs
- > 32 metre sign viewing distance
- > Equivalent light output to 8W T5 bulkheads
- > Fully compliant with EN60698.2.22
- > DALI self-test in accordance with BSEN62034



## PERFORMANCE

Light source	LED (x16)
Supply power	4.2W
Charge power	1.7W
Luminaire output	150lm
Colour temperature	5000K
Battery	3.6V 1.5Ah NiCd
Legend	EC format self adhesive kit




## MATERIALS

Finish	White polycarbonate
Diffuser	Clear fresnel
Wiring	20mm drill points

## OPTIONS

- > Double sided signage with 150mm deep opal diffuser
- > ISO legend format
- > Semi-recessing kit
- > Central battery functionality

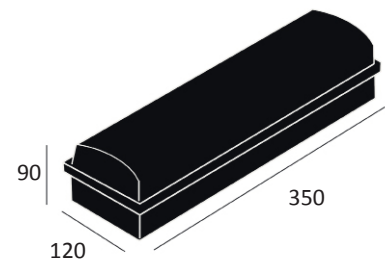

LAMP	LEGEND	STANDARD	DALI/SELF TEST
4.2W	None	83000105	83000103
4.2W	Arrow down	83000205	83000203
4.2W	Arrow right	83000305	83000303
4.2W	Arrow left	83000405	83000403