

## EM3H IP65 TWIN

IP65

CLASS  
I

C E

## FEATURES &amp; BENEFITS

- > High efficiency LED light source
- > Fine optical control for effective area illumination
- > No need to open the luminaire and risk compromising the integrity of its IP rating
- > Fully compliant with EN60598.2.22
- > Typically wall mounted 3m high, it can be spaced 25 metres apart to achieve 1Lux at the centre line of a corridor

## PERFORMANCE


Light source	LED (x 6 each head)
Supply power	2 x 5W
Charge power	2W (max)
Luminaire output	2 x 475lm
Colour temperature	5000K
Battery	7.2V 4.5Ah NiCd (3hr operation)

## MATERIALS

Body	GRP
Heads	Die-cast aluminium
Lens	Polycarbonate
Wiring	Cable entry rear and side

## OPTIONS

- > Automatic self-test in accordance with BSEN62034
- > DALI
- > Central battery functionality

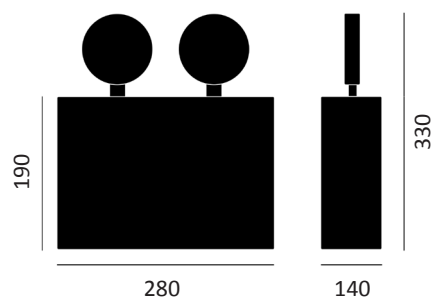

LAMP	LUMENS	STANDARD	DALI
2 x 5W	2 x 475lm	82400205	82400203