

EM3H RECESSED LED

IP20 CLASS I CE

FEATURES & BENEFITS

- > 3hr maintained/non-maintained operation
- > Attractive slim design
- > Screen printed panel to ensure uniform illumination of legend
- > Double sided acrylic blade - blank legends available if a single side is required
- > Quick and easy installation with fixing plate and adjustable arms
- > 28 metre sign viewing distance
- > All main internal wiring is low smoke, zero halogen (LSOH)
- > Fully compliant with EN60598.2.22



PERFORMANCE


Light source	LED (x15)
Supply power	4.5W (maintained)
Charge power	1.7W typically
Colour temperature	5000K
Battery	4.8V 0.9Ah NiCd
Legend	EC format supplied

MATERIALS

Body	Steel
Finish	White
Mounting	Recessed
Wiring	Top and rear cable entry

OPTIONS

- > Automatic self-test in accordance with BSEN62034
- > Legend ISO format
- > Central battery functionality

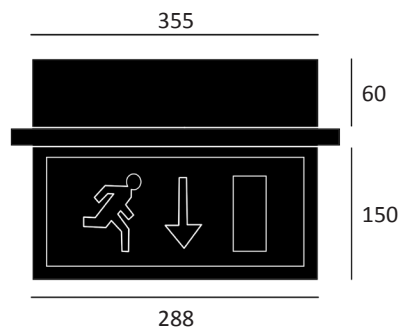

LAMP	LEGEND	DIMENSIONS	STANDARD	DALI
4.5W	Down/Down	288 x 150	82700105	82700103
4.5W	Right/Left	288 x 150	82700205	82700203