

EMG CURVE LED

IP20 CLASS I 850° C E

FEATURES & BENEFITS

- > 3hr maintained or non-maintained battery power operation after mains power failure
- > Self-testing - continuously tests battery voltage and operation of the LEDs
- > Downlight facility

PERFORMANCE


Light source	LED (CREE)
Battery	3.6V 3Ah Ni-Cd
Luminaire output	150lm (LED)
Viewing distance	30m

MATERIALS

Base	Sheet steel, stove enamelled
Finish	Zintec coated white
Legend	Self-extinguishing polycarbonate Arrow down supplied as standard
Cable knockouts	20mm rear

OPTIONS

- > DALI addressable
- > Brass or chrome finish available on request
- > ISO legends available
- > 24V, 50V or 100V ACDC option
- > Central battery functionality

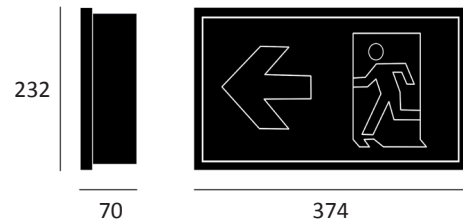

	CODE
4W White 3hr maintained	80701105
Mains only / 230V AC static driver	80701505

ACCESSORIES	
Legend arrow left	90180701
Legend arrow right	90180702