

EMG OVERSIZE LED

IP20 CLASS I 850° C E

FEATURES & BENEFITS

- > 3hr battery power operation after mains power failure
- > Downlight facility
- > EN 60598-2-22 compliant

PERFORMANCE


Light source	LED
Battery	3.6V 4Ah
Viewing distance	57m

MATERIALS

Base	Sheet steel, stove enamelled
Finish	Zintec coated white
Legend	Self-extinguishing polycarbonate Arrow down supplied as standard
Wiring	Top and side cable entry. Besa entry in the back

OPTIONS

- > DALI addressable
- > Self-test versions
- > Chrome or any RAL finish available on request
- > Ceiling mounted option
- > Additional legends available
- > ACDC slave: 24V, 50V or 110V
- > Central battery functionality

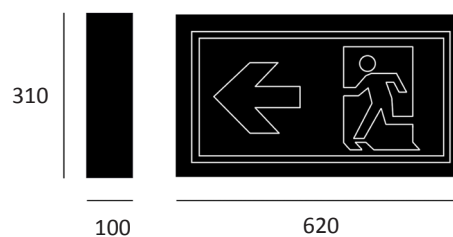

	CODE
LED 3hr non-maintained	80800305
T8 3hr non-maintained	80800105
T8 3hr maintained	80800205
Mains only/Static inverter	80800505
ACCESSORIES	
Legend arrow left	90180801
Legend arrow right	90180802
Test switch	90180803