

# FESTIVA LED

IP65 IK06 CLASS I CE


## FEATURES & BENEFITS

- > High resistance to UV and oxidation
- > Average rated LED life: >100,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > Light can be directed up or down making it ideal for lighting facades in small environments




## PERFORMANCE

Light source	LED
Distribution	Symmetric
LED output	1045 - 6920lm
Luminaire output	685 - 4171lm
CRI	>90
Beam angle	26° (7W) / 30° (32W) 35° (16W / 29W) - 14° on request 62° (47W) - 16° on request

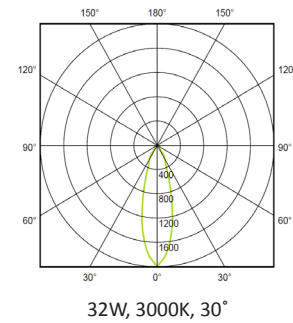

## MATERIALS

Body	Extruded aluminium EN-AB 44100
Finish	Anthracite grey / Light grey
Diffuser	4mm soda-lime tempered clear glass
External fixings	Stainless steel A4-70
Wiring	M16 cable gland
Mounting	U-Bracket

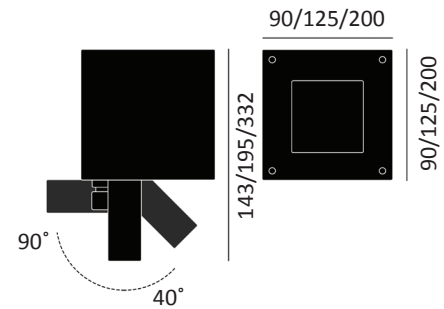

## OPTIONS

- > DALI
- > Coloured film
- > Spike, vandal-proof grid and anti-glare louvre available

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	BEAM	ANTHRACITE GREY	LIGHT GREY
7W	3000K	685lm	90 x 90 x 143	26°	72400101	72400201
7W	4000K	708lm	90 x 90 x 143	26°	72400301	72400401
16W	3000K	1581lm	125 x 125 x 195	35°	72400901	72401001
16W	4000K	1630lm	125 x 125 x 195	35°	72401101	72401201
29W	3000K	2877lm	125 x 125 x 195	35°	72401701	72401801
29W	4000K	2966lm	125 x 125 x 195	35°	72401901	72402001
32W	3000K	3533lm	200 x 200 x 332	30°	72402101	72402201
32W	4000K	3640lm	200 x 200 x 332	30°	72402301	72402401
47W	3000K	4045lm	200 x 200 x 332	62°	72402501	72402601
47W	4000K	4171lm	200 x 200 x 332	62°	72402701	72402801