



IP67 IK10 CLASS I 850° C E

FILA LED

A sleek, architectural luminaire with elegant clean lines designed for lighting public spaces.

FILA LED

FEATURES & BENEFITS

- > Sealed LED tubular luminaire
- > High impact resistance: IK10+ / 20 joules
- > High resistance to UV
- > Average rated LED life: >50,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > Photobiological hazard: RG0

PERFORMANCE



Light source	LED
Distribution	Symmetric
Luminaire output	2440 - 5610lm (Ø70) 3290 - 7920lm (Ø100)
Luminaire efficiency	≥122lm/W
CRI	>80

MATERIALS

Body	Opal polycarbonate TP(a), 2mm thick
End caps	Polished 304L stainless steel
External fixings	M6 Stainless steel CHC-type screws at each end
Wiring	ISO M20 nickel-plated brass IP67 cable gland for cable Ø6-12mm

OPTIONS

- > Wall wash optics and version with louvres
- > 316L stainless steel version for corrosive environments
- > 3000K
- > Suspension kit
- > Slave configuration
- > Male/female Wieland connectors and through-wiring 3 or 5 x 1.5mm² cable

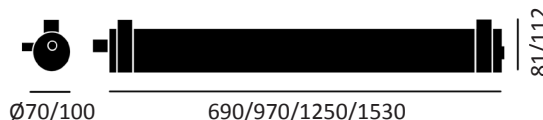

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI
19W	4000K	2440lm	Ø70 x 690	63500101	63500103
26W	4000K	3490lm	Ø70 x 970	63500201	63500203
36W	4000K	4880lm	Ø70 x 1250	63500301	63500303
41W	4000K	5610lm	Ø70 x 1530	63500401	63500403
26W	4000K	3290lm	Ø100 x 690	63500501	63500503
36W	4000K	4700lm	Ø100 x 970	63500601	63500603
49W	4000K	6470lm	Ø100 x 1250	63500701	63500703
63W	4000K	7920lm	Ø100 x 1530	63500801	63500803