

FOX LED

IP20 CLASS I CE

FEATURES & BENEFITS

- > Deeply positioned light source with black baffle for minimal glare and high visual comfort
- > Available in a fixed or adjustable version with a white or black finish to suit different environments
- > Adjustable version has a 25 degree tilt
- > Excellent heat sink for optimum heat dissipation
- > Long average LED life: >50,000hrs (L80/B10)
- > Supplied with quick connector and fly leads for easy installation and maintenance

PERFORMANCE



Light source	LED COB
Luminous efficiency	≥80lm/W
CRI	90
Beam angle	15° / 24° / 36° / 50°
UGR	12
Cut-out	Ø75mm

MATERIALS

Body	Die-cast aluminium
Finish	White (RAL 9010) / Black (RAL 9005)
Diffuser	Tempered glass (fixed)

OPTIONS

- > 3hr emergency
- > DALI

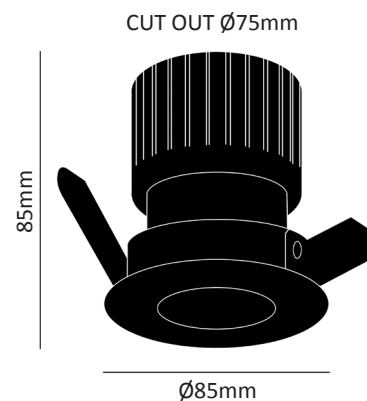

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	FIXED WHITE	BLACK	ADJUSTABLE WHITE	BLACK
7W	2700K	550lm	15°	32200101	32203701	32207301	32210901
7W	3000K	574lm	15°	32200201	32203801	32207401	32211001
7W	4000K	588lm	15°	32200301	32203901	32207501	32211101
7W	2700K	550lm	24°	32200401	32204001	32207601	32211201
7W	3000K	574lm	24°	32200501	32204101	32207701	32211301
7W	4000K	588lm	24°	32200601	32204201	32207801	32211401
7W	2700K	550lm	36°	32200701	32204301	32207901	32211501
7W	3000K	574lm	36°	32200801	32204401	32208001	32211601
7W	4000K	588lm	36°	32200901	32204501	32208101	32211701
7W	2700K	550lm	50°	32201001	32204601	32208201	32211801
7W	3000K	574lm	50°	32201101	32204701	32208301	32211901
7W	4000K	588lm	50°	32201201	32204801	32208401	32212001
10W	2700K	800lm	15°	32201301	32204901	32208501	32212101
10W	3000K	820lm	15°	32201401	32205001	32208601	32212201
10W	4000K	840lm	15°	32201501	32205101	32208701	32212301
10W	2700K	800lm	24°	32201601	32205201	32208801	32212401
10W	3000K	820lm	24°	32201701	32205301	32208901	32212501
10W	4000K	840lm	24°	32201801	32205401	32209001	32212601
10W	2700K	800lm	36°	32201901	32205501	32209101	32212701
10W	3000K	820lm	36°	32202001	32205601	32209201	32212801
10W	4000K	840lm	36°	32202101	32205701	32209301	32212901
10W	2700K	800lm	50°	32202201	32205801	32209401	32213001
10W	3000K	820lm	50°	32202301	32205901	32209501	32213101
10W	4000K	840lm	50°	32202401	32206001	32209601	32213201
15W	2700K	1200lm	15°	32202501	32206101	32209701	32213301
15W	3000K	1230lm	15°	32202601	32206201	32209801	32213401
15W	4000K	1265lm	15°	32202701	32206301	32209901	32213501
15W	2700K	1200lm	24°	32202801	32206401	32210001	32213601
15W	3000K	1230lm	24°	32202901	32206501	32210101	32213701
15W	4000K	1265lm	24°	32203001	32206601	32210201	32213801
15W	2700K	1200lm	36°	32203101	32206701	32210301	32213901
15W	3000K	1230lm	36°	32203201	32206801	32210401	32214001
15W	4000K	1265lm	36°	32203301	32206901	32210501	32214101
15W	2700K	1200lm	50°	32203401	32207001	32210601	32214201
15W	3000K	1230lm	50°	32203501	32207101	32210701	32214301
15W	4000K	1265lm	50°	32203601	32207201	32210801	32214401