

GOLF 57 X-SECTION

IP20

CLASS I

CE



SECTION 02: LINEAR

FEATURES & BENEFITS

- > Individual or continuous ceiling mounting
- > Complements the Golf 57 linear range
- > Average LED life: >54,000hrs - (L90/B10) - maintenance free
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance

PERFORMANCE




Light source	LED
Emission	Direct
Luminaire output	2903 - 4950lm (DIR)
Luminaire efficiency	≥100lm/W
CRI	84

MATERIALS

Body	Extruded aluminium profile
Finish	Grey / White / Black
Diffuser	Opal polycarbonate TP(a)
Mounting	Surface or suspended

OPTIONS

- > 3hr emergency
- > Tuneable white
- > Linear joints, end caps & suspension kits
- > 2-step MacAdam ellipse tolerance
- > Microprism diffuser
- > Bluetooth enabled
- > Internal fuse and LSOH cables

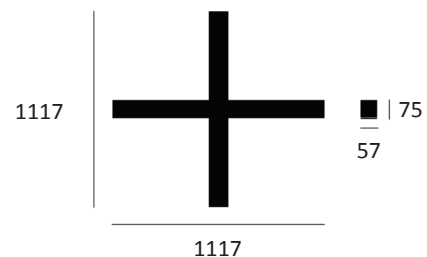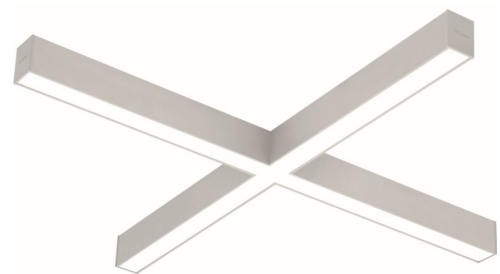

LAMP	COLOUR TEMP	DELIVERED LUMENS	STANDARD			DALI		
			GREY	WHITE	BLACK	GREY	WHITE	BLACK
27W	3000K	2903lm	61204901	61205701	61206501	61204903	61205703	61206503
27W	4000K	2957lm	61205001	61205801	61206601	61205003	61205803	61206603
34W	3000K	3571lm	61205101	61205901	61206701	61205103	61205903	61206703
34W	4000K	3637lm	61205201	61206001	61206801	61205203	61206003	61206803
41W	3000K	4224lm	61205301	61206101	61206901	61205303	61206103	61206903
41W	4000K	4302lm	61205401	61206201	61207001	61205403	61206203	61207003
48W	3000K	4860lm	61205501	61206301	61207101	61205503	61206303	61207103
48W	4000K	4950lm	61205601	61206401	61207201	61205603	61206403	61207203

www.spearlighting.com | T: 01895 746006 | F: 01895 746005