

## FEATURES & BENEFITS

- > Robust design with captive screws
- > No spotting - even light distribution
- > Long rated LED life: >51,000hrs (L90/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > UV stabilised - no yellowing



## PERFORMANCE



Light source	LED
LED output	2540 - 3710lm
Luminaire output	2110 - 3130lm
Luminaire efficiency	≥123lm/W
CRI	>80

## MATERIALS

Body	Polycarbonate
Finish	White
Diffuser	Opal polycarbonate TP(a)

## OPTIONS

- > Microwave sensor for enhanced energy savings
- > Grey body
- > Bluetooth enabled
- > Internal fuse and LSOH cable

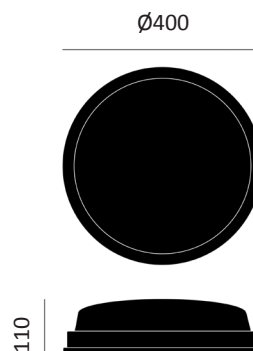

LAMP	COLOUR TEMP	DELIVERED LUMENS	FINISH	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
17W	3000K	2110lm	White	41000501	-	41000591	-
17W	4000K	2140lm	White	41000601	-	41000691	-
25W	3000K	3070lm	White	41000701	41000703	41000791	41000793
25W	4000K	3130lm	White	41000801	41000803	41000891	41000893