



IP67 IK10 CLASS I CE

JUKE LINEAR LED

A highly efficient, linear in-ground LED luminaire available with multiple optics. Ideal for illuminating parks, squares, entrances, gardens and pathways.

JUKE LINEAR LED

FEATURES & BENEFITS

- > High resistance to oxidation
- > Excellent thermal management
- > Average rated LED life: >60,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance
- > 1000Kg static load




PERFORMANCE

Light source	LED
LED output	2201 - 4402lm
Luminaire output	1868 - 3614lm
CRI	>80

MATERIALS


Body	Aluminium profile treated to resist external conditions
Finish	Anthracite grey (RAL 7037)
Diffuser	10mm hardened glass with high class silicone gaskets to ensure the integrity of the IP rating
External fixings	Stainless steel
Mounting	Installation housing supplied

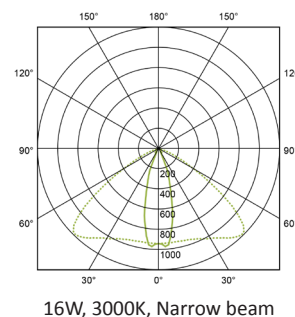

16W, 3000K, Narrow beam

OPTIONS

- > 4000K

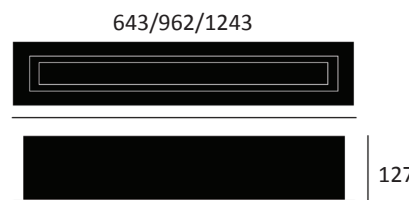

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	DIMENSIONS	STANDARD
16W	3000K	1868lm	Narrow	643 x 120	70301201
16W	3000K	1950lm	Medium	643 x 120	70301401
16W	3000K	2066lm	Wide	643 x 120	70301601
21W	3000K	2877lm	Narrow	962 x 120	70301801
21W	3000K	3002lm	Medium	962 x 120	70302001
21W	3000K	3182lm	Wide	962 x 120	70302201
32W	3000K	3737lm	Narrow	1243 x 120	70302401
32W	3000K	3900lm	Medium	1243 x 120	70302601
32W	3000K	3614lm	Wide	1243 x 120	70302801