

# NAVARA IP65 LED

**IP65** **IK10** **CLASS I**  
**850°** **CE**

SECTION 02: LINEAR

## FEATURES & BENEFITS

- > Ideal for clean environments
- > Average rated LED life: >50,000hrs (L70/B10) @ TC=65°C
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > Easy height adjustment without any tools

## PERFORMANCE



Light source	LED
Emission	Direct
Luminaire output	2133 - 5375lm
Luminaire efficiency	≥150lm/W
CRI	>80
Beam angle	120 degrees

## MATERIALS

Body	Aluminium
Finish	Matt white
Diffuser	Opal polycarbonate TP(a)
End caps	Polycarbonate
Mounting	Stainless steel suspension cable 1m Polycarbonate surface bracket

## OPTIONS

- > DALI
- > 3hr emergency
- > 3m and 5m suspension cable
- > Stainless steel surface mounting kit

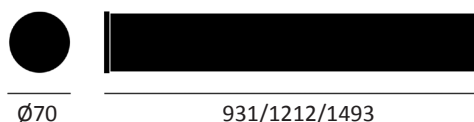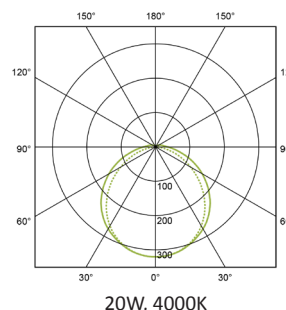

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	BEAM	STANDARD SUSPENDED	SURFACE
13W	3000K	2133lm	Ø70 x 931	120°	60100101	60101301
13W	4000K	2234lm	Ø70 x 931	120°	60100201	60101401
20W	3000K	3079lm	Ø70 x 931	120°	60100301	60101501
20W	4000K	3225lm	Ø70 x 931	120°	60100401	60101601
18W	3000K	2844lm	Ø70 x 1212	120°	60100501	60101701
18W	4000K	2979lm	Ø70 x 1212	120°	60100601	60101801
27W	3000K	4105lm	Ø70 x 1212	120°	60100701	60101901
27W	4000K	4300lm	Ø70 x 1212	120°	60100801	60102001
22W	3000K	3555lm	Ø70 x 1493	120°	60100901	60102101
22W	4000K	3724lm	Ø70 x 1493	120°	60101001	60102201
34W	3000K	5131lm	Ø70 x 1493	120°	60101101	60102301
34W	4000K	5375lm	Ø70 x 1493	120°	60101201	60102401

www.spearlighting.com | T: 01895 746006 | F: 01895 746005