

PANAMERA LED

IP65 IK06 CLASS I CE

SECTION 12: EXTERIOR

FEATURES & BENEFITS

- > High resistance to UV and oxidation
- > Average rated LED life: >50,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance




PERFORMANCE

Light source	LED
Distribution	Symmetric
Luminaire output	660 - 1425lm
CRI	>80
Beam angle	Flood


MATERIALS

Body	Die-cast aluminium EN AB 44100
Finish	Anthracite grey / Light grey
Diffuser	3mm soda-lime tempered acid etched glass
Mounting	Ceiling
External fixings	Stainless steel A4-70
Wiring	M20 cable gland \varnothing 7/13mm



OPTIONS

- > DALI

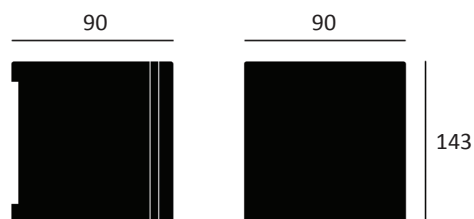

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	BEAM	ANTHRACITE GREY	LIGHT GREY
26W	3000K	1693lm	90 x 90 x 143	60°	76500101	76500201
26W	4000K	1742lm	90 x 90 x 143	60°	76500301	76500401