

# PROTON LED

IP20 CLASS I F MARK CE

## FEATURES & BENEFITS

- > Fully LG7 compliant
- > High light transparency
- > Average rated LED life: >54,000hrs (L90/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > Two sizes available
- > Photobiological hazard: RG1

## PERFORMANCE




Light source	LED
LED output	3850 - 5880lm
Luminaire output	3250 - 4980lm
Luminaire efficiency	≥120lm/W
CRI	>80
UGR	<19

## MATERIALS

Body	Sheet steel
Finish	White
Louvre	Anodised polished aluminium

## OPTIONS

- > Tuneable white
- > Suspension kit
- > Surface mounting brackets
- > Internal fuse and LSOH cable

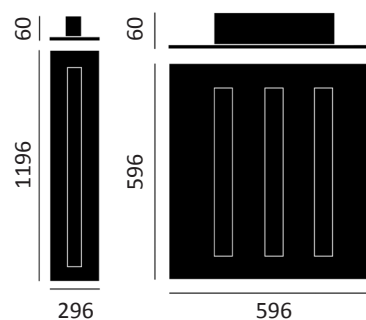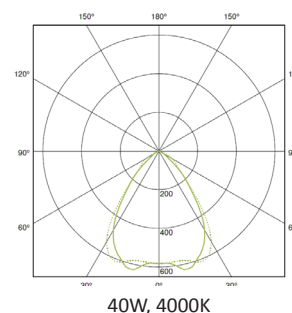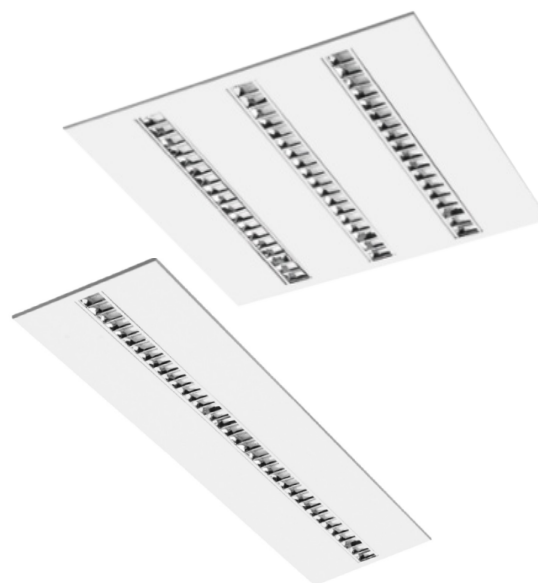

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI	EMERGENCY STANDARD	DALI
27W	3000K	3250lm	596 x 596	12001301	12001303	12001391	12001393
27W	4000K	3320lm	596 x 596	12001401	12001403	12001491	12001493
40W	3000K	4880lm	596 x 596	12001501	12001503	12001591	12001593
40W	4000K	4980lm	596 x 596	12001601	12001603	12001691	12001693
27W	3000K	3250lm	296 x 1196	12001701	12001703	12001791	12001793
27W	4000K	3320lm	296 x 1196	12001801	12001803	12001891	12001893