

RING LED

IP20 CLASS I CE

FEATURES & BENEFITS

- > Available in multiple sizes for grouping
- > Homogeneous light distribution - no spotting
- > Average rated LED life: >50,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance

PERFORMANCE



Light source	LED
LED output	2423 - 6543lm
Luminaire output	2295 - 6523lm
Luminaire efficiency	≥92lm/W
CRI	>80

MATERIALS

Body	Extruded aluminium profile
Finish	Grey / White / Black
Diffuser	Satin opal
Mounting	Suspension

OPTIONS

- > 3hr emergency
- > DALI
- > Other RAL finishes on request
- > Ø1200mm

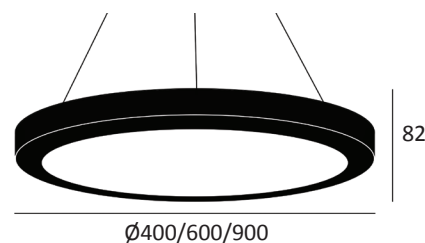

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	GREY	WHITE	BLACK
24W	3000K	2295lm	Ø400 x 82	63600101	63600701	63601301
24W	4000K	2416lm	Ø400 x 82	63600201	63600801	63601401
41W	3000K	3824lm	Ø600 x 82	63600301	63600901	63601501
41W	4000K	4157lm	Ø600 x 82	63600401	63601001	63601601
65W	3000K	5980lm	Ø900 x 82	63600501	63601101	63601701
65W	4000K	6523lm	Ø900 x 82	63600601	63601201	63601801