

SENSPOT LED

IP65	IP44	IK10 ⁺	CLASS II
		850°	CE

FEATURES & BENEFITS

- > High impact resistance: IK10+ / 50 joules
- > Rip-out resistant fastenings with vandal resistant screws
- > Sealed front and rear
- > Suitable for marine environments
- > Average rated LED life: >50,000hrs (L80/B50) - no maintenance
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance



PERFORMANCE


Light source	LED
Luminaire output	1247 - 1630lm
Luminaire efficiency	≥98lm/W
CRI	>80

MATERIALS

Body & Bezel	Zamak
Finish	White (RAL 9016)
Diffuser	Clear polycarbonate
External fittings	2 steel TORX type screws
Wiring	Remote IP20 power supply with 30cm cable. Sealed connection box with cable gland for IP65 version

OPTIONS

- > Microwave sensor for enhanced energy savings
- > Slave version
- > Other RAL finishes
- > Back box for use in concrete

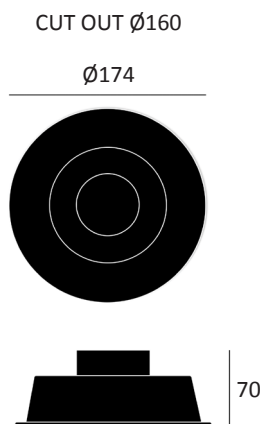

LAMP	COLOUR TEMP	DELIVERED LUMENS	IP RATING	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
12W	3000K	1247lm	IP44	34100101	34100103	34100191	34100193
12W	4000K	1300lm	IP44	34100201	34100203	34100291	34100293
16W	3000K	1564lm	IP44	34100301	34100303	34100391	34100393
16W	4000K	1630lm	IP44	34100401	34100403	34100491	34100493
12W	3000K	1247lm	IP65	34100501	34100503	34100591	34100593
12W	4000K	1300lm	IP65	34100601	34100603	34100691	34100693
16W	3000K	1564lm	IP65	34100701	34100703	34100791	34100793
16W	4000K	1630lm	IP65	34100801	34100803	34100891	34100893