

SIERRA IP LED


IP65

CLASS
I

C E

FEATURES & BENEFITS

- > Uniform light distribution
- > Average rated LED life: >54,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > Various sizes available
- > Photobiological hazard: RG1

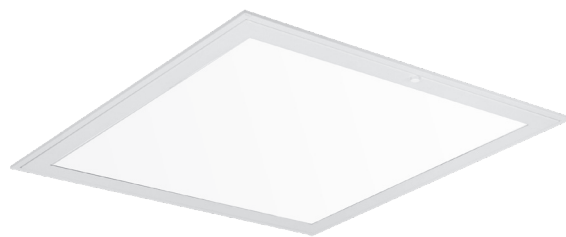

PERFORMANCE



Light source	LED
LED output	6360 - 14480lm
Luminaire output	4010 - 9560lm
Luminaire efficiency	≥93lm/W
CRI	>83

MATERIALS

Body	Sheet steel
Finish	White
Diffuser	Opal polycarbonate TP(a)

OPTIONS

- > 2 step MacAdam, CRI >90
- > Other lumen outputs available
- > SAS and Burgess-T ceiling version
- > Tuneable white
- > Internal fuse and LSOH cable

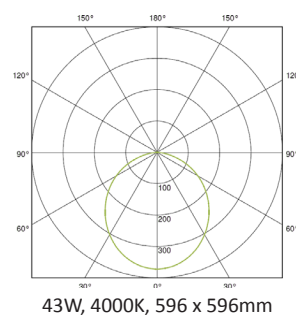

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI	EMERGENCY STANDARD	DALI
43W	3000K	4170lm	596 x 596	11001501	11001503	11001591	11001593
43W	4000K	4250lm	596 x 596	11001601	11001603	11001691	11001693
43W	3000K	4010lm	296 x 1196	11001701	11001703	11001791	11001793
43W	4000K	4090lm	296 x 1196	11001801	11001803	11001891	11001893
100W	3000K	9380lm	596 x 1196	11001901	11001903	11001991	11001993
100W	4000K	9560lm	596 x 1196	11002001	11002003	11002091	11002093