



IP20 CLASS I CE

SLIMLINE RING

A decorative and elegant, slim ring-shaped LED pendant luminaire with a milky diffuser. Ideal for lobbies, reception areas, meeting rooms, showrooms, hospitality and residential environments.

SLIMLINE RING LED



FEATURES & BENEFITS

- > Multiple sizes available for design flexibility
- > Average rated LED life: >70,000hrs L80/B20 [Ta@ 25°C]
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > Adjustable suspension height: 300-1400mm

PERFORMANCE



Light source	LED
Luminaire output	2400 - 6100lm
CRI	>80

MATERIALS


Body	Sheet steel
Finish	White / Black
Diffuser	Opal PMMA

OPTIONS

- > Surface mounted version
- > Other RAL finishes
- > Duo version with 2 connected rings and Quadruple version

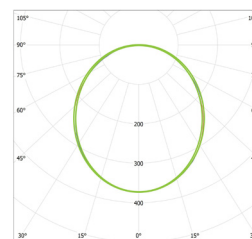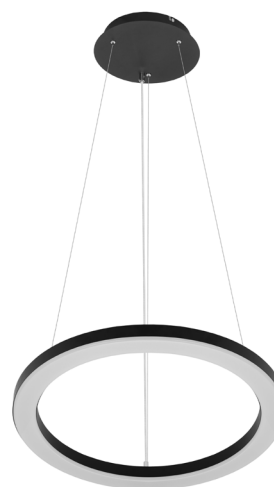

53W, 3000K, 900mm

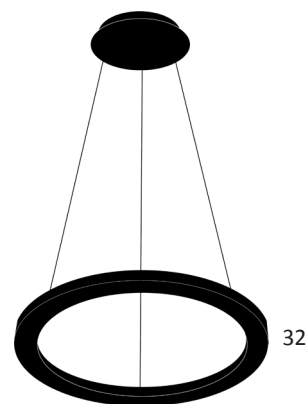

Ø602/900/1200

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	FINISH	STANDARD	DALI
38W	3000K	3230lm	Ø602 x 32	White	65600101	65600103
38W	4000K	3570lm	Ø602 x 32	White	65600201	65600203
38W	3000K	2400lm	Ø602 x 32	Black	65602101	65602103
38W	4000K	2590lm	Ø602 x 32	Black	65602201	65602203
53W	3000K	5490lm	Ø602 x 32	White	65600301	65600303
53W	4000K	6100lm	Ø602 x 32	White	65600401	65600403
53W	3000K	4260lm	Ø602 x 32	Black	65602301	65602303
53W	4000K	4700lm	Ø602 x 32	Black	65602401	65602403

SLIMLINE RING LED

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	FINISH	STANDARD	DALI
38W	3000K	3230lm	Ø900 x 32	White	65600501	65600503
38W	4000K	3570lm	Ø900 x 32	White	65600601	65600603
38W	3000K	2400lm	Ø900 x 32	Black	65602501	65602503
38W	4000K	2590lm	Ø900 x 32	Black	65602601	65602603
53W	3000K	4500lm	Ø900 x 32	White	65600701	65600703
53W	4000K	4980lm	Ø900 x 32	White	65600801	65600803
53W	3000K	3340lm	Ø900 x 32	Black	65602701	65602703
53W	4000K	3600lm	Ø900 x 32	Black	65602801	65602803
62W	3000K	5060lm	Ø1200 x 32	White	65600901	65600903
62W	4000K	5620lm	Ø1200 x 32	White	65601001	65601003
62W	3000K	3900lm	Ø1200 x 32	Black	65602901	65602903
62W	4000K	4300lm	Ø1200 x 32	Black	65603001	65603003

