

SNAKE LED

IP40

CLASS
I

C E

FEATURES & BENEFITS

- > Multiple outputs and finishes for design flexibility
- > Homogeneous light distribution - no spotting
- > Average rated LED life >52,000hrs (L90/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance



PERFORMANCE



Light source	LED
Emission	Direct
Luminaire output	4662 - 7820lm
Luminaire efficiency	≥100lm/W
CRI	>83
Beam angle	Wide beam

MATERIALS

Body	Extruded aluminium profile
Finish	Grey / White / Black
Diffuser	Opal PMMA
Mounting	Suspension, 1.5m

OPTIONS

- > 3hr emergency
- > Other RAL finishes on request

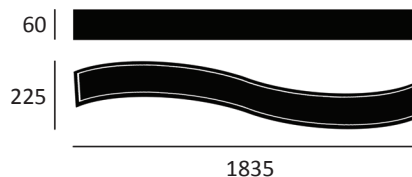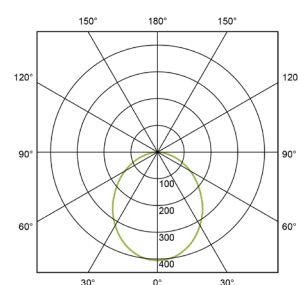

LAMP	COLOUR TEMP	DELIVERED LUMENS	STANDARD			DALI		
			GREY	WHITE	BLACK	GREY	WHITE	BLACK
44W	3000K	4662lm	61000101	61000201	61000301	61000103	61000203	61000303
44W	4000K	4692lm	61000401	61000501	61000601	61000403	61000503	61000603
57W	3000K	5820lm	61000701	61000801	61000901	61000703	61000803	61000903
57W	4000K	5865lm	61001001	61001101	61001201	61001003	61001103	61001203
68W	3000K	6835lm	61001301	61001401	61001501	61001303	61001403	61001503
68W	4000K	6882lm	61001501	61001701	61001801	61001503	61001703	61001803
78W	3000K	7770lm	61001901	61002001	61002101	61001903	61002003	61002103
78W	4000K	7820lm	61002201	61002301	61002401	61002203	61002303	61002403