

SONATA LED

IP54

CLASS
I

C E

FEATURES & BENEFITS

- > Multiple outputs, lengths, beams and finishes
- > Long rated LED life: >50,000hrs (L80/B10)
- > Optimum colour consistency—3 step MacAdam ellipse tolerance
- > Uniform illumination

PERFORMANCE



Light source	LED
Distribution	Symmetric/Asymmetric
Luminaire output	8804 - 26956lm
Lumen efficiency	≥137lm/W
CRI	>80
Beam angle	30°/60°/90°

MATERIALS

Body	Aluminium
Finish	White
Diffuser	Tempered glass
Mounting	Surface/Suspended

OPTIONS

- > 3hr emergency
- > Grey or black finish
- > 3000K / 5000K
- > Asymmetric distribution

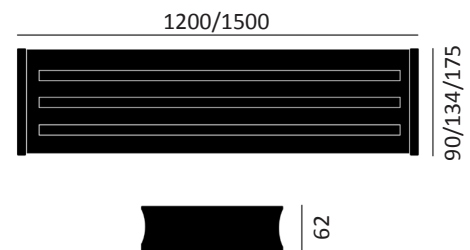

SONATA LED

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM ANGLE	DIMENSIONS	STANDARD	DALI
62W	4000K	8804lm	30°	1200 x 90 x 62	64600101	64600103
95W	4000K	13395lm	30°	1500 x 90 x 62	64600201	64600203
97W	4000K	13304lm	30°	1200 x 134 x 62	64600301	64600303
145W	4000K	20358lm	30°	1500 x 134 x 62	64600401	64600403
129W	4000K	17693lm	30°	1200 x 175 x 62	64600501	64600503
195W	4000K	26956lm	30°	1500 x 175 x 62	64600601	64600603
62W	4000K	8804lm	60°	1200 x 90 x 62	64600701	64600703
95W	4000K	13395lm	60°	1500 x 90 x 62	64600801	64600803
97W	4000K	13304lm	60°	1200 x 134 x 62	64600901	64600903
145W	4000K	20358lm	60°	1500 x 134 x 62	64601001	64601003
129W	4000K	17693lm	60°	1200 x 175 x 62	64601101	64601103
195W	4000K	26956lm	60°	1500 x 175 x 62	64601201	64601203
62W	4000K	8804lm	90°	1200 x 90 x 62	64601301	64601303
95W	4000K	13395lm	90°	1500 x 90 x 62	64601401	64601403
97W	4000K	13304lm	90°	1200 x 134 x 62	64601501	64601503
145W	4000K	20358lm	90°	1500 x 134 x 62	64601601	64601603
129W	4000K	17693lm	90°	1200 x 175 x 62	64601701	64601703
195W	4000K	26956lm	90°	1500 x 175 x 62	64601801	64601803

