



IP66 IK06 CLASS I CE

# SWALLOW LED

A compact, recessed wall luminaire ideal for pathways, driveways, entrances and similar applications.

# SWALLOW LED


## FEATURES & BENEFITS

- > High resistance to UV and oxidation
- > Shock resistant glass diffuser
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance
- > Average rated LED life: >100,000hrs (L80/B10)
- > Shallow recessing depth



## PERFORMANCE

Light source	LED
Distribution	Symmetric
LED output	820 - 2140lm
Luminaire output	222 - 912lm
CRI	>85
Beam angle	110 degrees

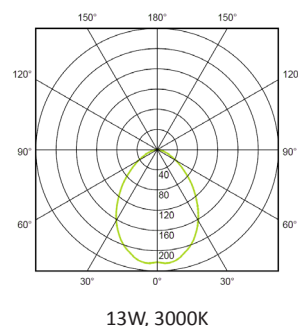


## MATERIALS

Body	Die-cast aluminium EN AB 44100
Finish	Stainless steel A4-70
Diffuser	5mm soda-lime tempered acid-etched glass with sealing gasket
External fixings	Stainless steel A4-70 treated with water repellent lubricating solution.
Housing	Polypropylene (supplied)
Wiring	Double Ø10/14 mm silicone cable gland

## OPTIONS

- > Grill option (6W only)
- > IP68 easy connector

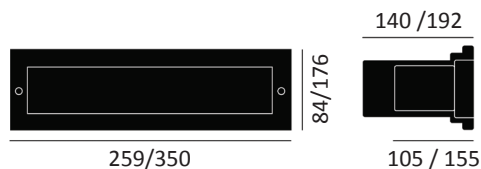

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI
6.2W	3000K	222lm	259 x 84	74600101	74600103
6.2W	4000K	227lm	259 x 84	74600201	74600203
13W	3000K	868lm	350 x 176	74600301	74600303
13W	4000K	912lm	350 x 176	74600401	74600403