

TILIA LED




FEATURES & BENEFITS

- > Vandal resistant
- > Available in various lumen outputs and sizes
- > Long rated LED life: >67,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance



PERFORMANCE

| | |
|----------------------|----------------|
| Light source | LED |
| LED output | 2460 - 10200lm |
| Luminaire output | 1750 - 6830lm |
| Luminaire efficiency | ≥89lm/W |
| CRI | >80 |
| Beam angle | 110° |

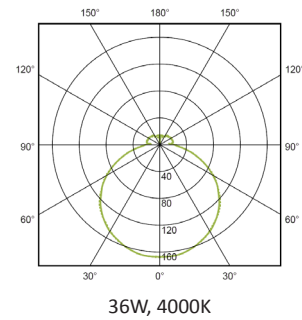


MATERIALS

| | |
|----------|--------------------------|
| Body | Sheet steel |
| Finish | White |
| Diffuser | Opal polycarbonate TP(a) |

OPTIONS

- > Microwave sensor for enhanced energy savings
- > Bluetooth enabled
- > Replacement shade
- > Triple layer matt glass diffuser

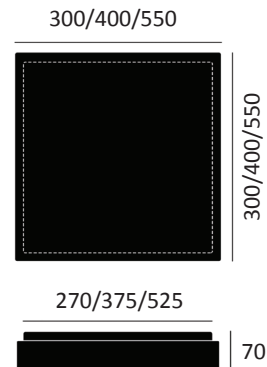

| LAMP | COLOUR TEMP | DELIVERED LUMENS | DIMENSIONS | STANDARD | DALI | EMERGENCY | |
|------|-------------|------------------|------------|----------|----------|-----------|----------|
| | | | | | | STANDARD | DALI |
| 19W | 3000K | 1750lm | 300x300 | 42500101 | 42500103 | 42500191 | 42500193 |
| 19W | 4000K | 1840lm | 300x300 | 42500201 | 42500203 | 42500291 | 42500293 |
| 25W | 3000K | 2290lm | 300x300 | 42500301 | 42500303 | 42500391 | 42500393 |
| 25W | 4000K | 2400lm | 300x300 | 42500401 | 42500403 | 42500491 | 42500493 |
| 28W | 3000K | 2470lm | 400x400 | 42500501 | 42500503 | 42500591 | 42500593 |
| 28W | 4000K | 2610lm | 400x400 | 42500601 | 42500603 | 42500691 | 42500693 |
| 36W | 3000K | 3250lm | 400x400 | 42500701 | 42500703 | 42500791 | 42500793 |
| 36W | 4000K | 3400lm | 400x400 | 42500801 | 42500803 | 42500891 | 42500893 |
| 36W | 3000K | 3450lm | 550x550 | 42500901 | 42500903 | 42500991 | 42500993 |
| 36W | 4000K | 3640lm | 550x550 | 42501001 | 42501003 | 42501091 | 42501093 |
| 75W | 3000K | 6480lm | 550x550 | 42501101 | 42501103 | 42501191 | 42501193 |
| 75W | 4000K | 6830lm | 550x550 | 42501201 | 42501203 | 42501291 | 42501293 |