


# TUBO WALL IP65

IP65 CLASS I CE

An architectural, wall-mounted cylindrical LED luminaire that can provide both direct and direct/indirect illumination. Suitable for use indoors and outdoors.


## FEATURES & BENEFITS

- > Elegant design with clean, smooth lines
- > Average rated LED life: >60,000hrs (L90/B10)
- < Optimum colour consistency - 3 step MacAdam ellipse tolerance

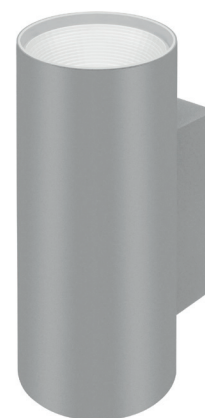


## PERFORMANCE

Light source	LED
LED output	1510 - 4030lm (Direct) 2110 - 3100lm (Direct/Indirect)
Luminaire output	1100 - 2940lm (Direct) 1820 - 2260lm (Direct/Indirect)
Luminaire efficiency	≥ 105lm/W
CRI	>80
Beam angle	50° (Direct)

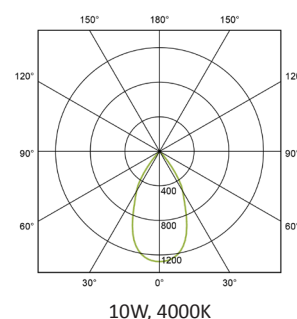

## MATERIALS

Body	Aluminium profile
Finish	Anthracite grey / White / Black
Diffuser	Clear tempered glass

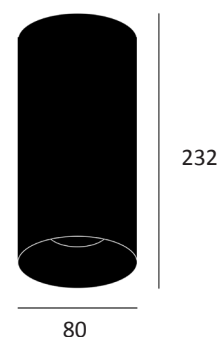

LAMP	COLOUR TEMP	LUMENS	DISTRIBUTION	BEAM	ANTHRACITE GREY	WHITE	BLACK
10W	3000K	1100lm	DIR	50°	43800101	43801301	43802501
10W	4000K	1130lm	DIR	50°	43800201	43801401	43802601
15W	3000K	1580lm	DIR	50°	43800301	43801501	43802701
15W	4000K	1630lm	DIR	50°	43800401	43801601	43802801
26W	3000K	2860lm	DIR	50°	43800501	43801701	43802901
26W	4000K	2940lm	DIR	50°	43800601	43801801	43803001
15W	3000K	1820lm	DI/IN	15° / 15°	43800701	43801901	43803101
15W	4000K	1860lm	DI/IN	15° / 15°	43800801	43802001	43803201
15W	3000K	1800lm	DI/IN	70° / 15°	43800901	43802101	43803301
15W	4000K	1850lm	DI/IN	70° / 15°	43801001	43802201	43803401
20W	3000K	2200lm	DI/IN	50° / 50°	43801101	43802301	43803501
20W	4000K	2260lm	DI/IN	50° / 50°	43801201	43802401	43803601