
IP65 IK10⁺⁺ CLASS I 850° C E

URBALINE LED

A robust luminaire designed to withstand extreme vandalism and marine corrosion thanks to its treatment approved to the Qualanod quality mark, Class 20.

Ideal for public buildings and spaces requiring increased protection such as railway and bus stations, pedestrian subways etc.

URBALINE LED

FEATURES & BENEFITS

- > High impact resistance: IK10++/ 150 joules
- > Reinforced aluminium end caps
- > Straight or angled corner versions
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance
- > Average rated LED life: >50,000hrs (L90/B50)
- > Photobiological hazard: RG0

PERFORMANCE




Light source	LED
Distribution	Symmetric
Luminaire output	2050 - 7250lm
Luminaire efficiency	≥97lm/W
CRI	>80

MATERIALS

Body	4mm thick marine grade 6060 aluminium
Finish	Qualanod 20μ anodised aluminium
Diffuser	Opal polycarbonate TP(a)
External fixings	M5 stainless steel screws with 2-point tamper proof heads
Wiring	Dual entry for 3 x 1.5mm ² cables

OPTIONS

- > 370mm length
- > Lower lumen outputs and 3000K
- > Microwave sensors
- > Slave configurations

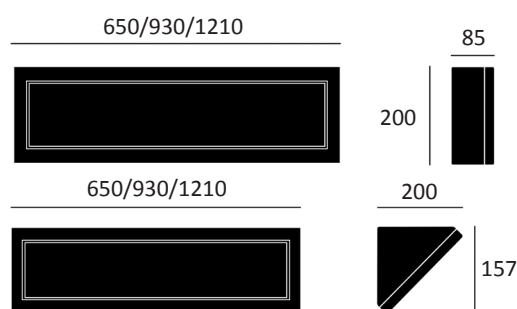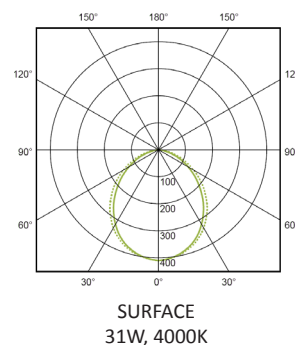

LAMP	COLOUR TEMP	DELIVERED LUMENS	LENGTH	SURFACE STANDARD	EMERGENCY	ANGLED STANDARD	EMERGENCY
21W	4000K	2050lm	650	74200601	74200691	74202201	74202291
43W	4000K	4150lm	650	74200801	74200891	74202401	74202491
31W	4000K	3100lm	930	74201001	74201091	74202601	74202691
62W	4000K	6250lm	930	74201201	74201291	74202801	74202891
43W	4000K	4150lm	1210	74201401	74201491	74203001	74203091
70W	4000K	7250lm	1210	74201601	74201691	74203201	74203291