




	T5	
83		
	83	1272 / 1574
	T8	
83		
	83	709 / 1319 / 1624

INSTRUCTIONS

- a) Make sure the cables are disconnected from the power supply before assembly, maintenance or repair work.
- b) Affix the ceiling clamps to the wall or to the ceiling with the screw. Be careful not to damage either other cables or other electrical equipment in the ceiling or in the wall.
- c) To open the luminaire remove the end cap and displace the body fitting all the way out the tube (Fig.1).
- d) Remove the blue protecting layer from the reflector and place the fluorescent tubes (snap them in by turning until they fit properly in the lampholders).
- e) Pass the cable through the cable gland (Fig.2). Make sure that the rubber is placed between the end cap and the connector to ensure the water-resistance.
- f) First connect the protective ground cable and then the others. Pay attention to the sequence Earth, Neutral and Live.
- g) Before turning on the lamp make sure that the electrical connections are correct.
- h) Insert the body fitting and place the end cap. Before placing the end cap, make sure that the rubber seal is placed in the lower cavity. Push the end cap and make sure that the rubber seal has been moved to the final place.

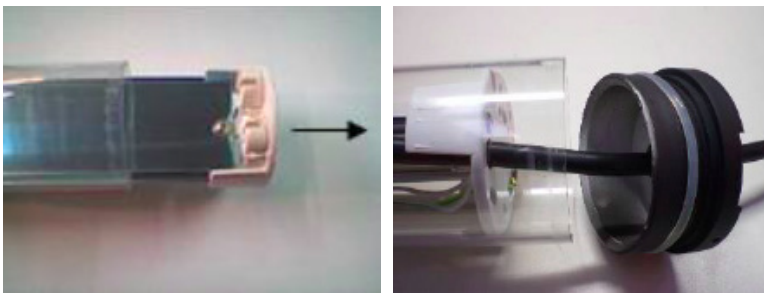

IMPORTANT WARNINGS

Do not install the luminaire in areas without sufficient air circulation. The manufacturer cannot be considered liable for any damage caused by inappropriate use of the luminaire other than its manufactured purpose. Luminaries must be installed by a qualified registered electrician only. Any misuse of the luminaire when power is activated may cause the risk of an electric shock. The manufacturer does not accept any responsibility of any issues resulting from the non-compliance of the recommendations included in this instruction document. These instructions are issued as a guide to assist the installer to satisfactory conclusion. The manufacturer reserves the right to change the design of this product without prior notice.

WASTE DIRECTIVE

The European Directive 2002/96/EC on waste electrical and electronic equipment requires that electric and electronic devices must not be disposed of in the normal household waste. For correct disposal, please use authorized waste disposal facilities or return to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, should not be broken up as they contain pollutants, which are harmful to the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

