



IP20 IK10 CLASS I CE


SPORTAGE

A surface mounted, high output LED luminaire with a protective grid designed for the illumination of sports halls, tennis and squash courts.

SPORTAGE LED


FEATURES & BENEFITS

- > Impact resistant protection grid
- > Symmetrically placed louvres to increase light output up to 20000lm
- > Average rated LED life: >52,000hrs (L90/B10)
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance
- > DIN 18032-3:1997-04 and DIN EN 13964:2014-08 certified

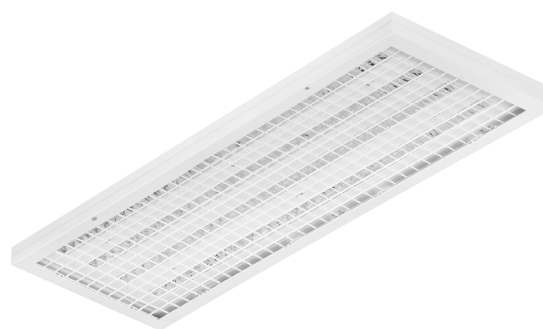

PERFORMANCE

Light source	LED
Emission	Direct
LED output	7690 - 25640lm
Luminaire output	6000 - 20000lm
Luminaire efficiency	≥120lm/W
CRI	83
Beam angle	Mid beam

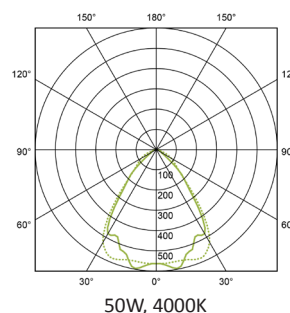


MATERIALS

Body	Sheet steel
Finish	White
Diffuser	Microprism
Louvre	Anodised aluminium
Mounting	Surface

OPTIONS

- > 3hr emergency
- > Internal fuse and LSOH cables

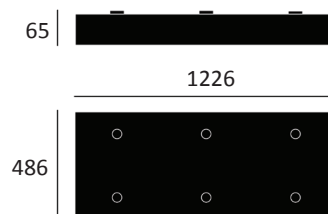

LAMP	COLOUR TEMP	DELIVERED LUMENS	STANDARD	DALI	EMERGENCY	
					STANDARD	DALI
50W	3000K	6000lm	24800801	24800803	24800891	24800893
50W	4000K	6150lm	24800901	24800903	24800991	24800993
100W	3000K	12060lm	24801001	24801003	24801091	24801093
100W	4000K	12300lm	24801101	24801103	24801191	24801193
145W	3000K	19500lm	24801201	24801203	24801291	24801293
145W	4000K	20000lm	24801301	24801303	24801391	24801393