

# BORGO LED

IP65 IK10+ CLASS I  
850° CE

## FEATURES & BENEFITS

- > High impact resistance: IK10+ / 80 joules
- > Anti-graffiti protection
- > Non-corrosive
- > Compact design
- > Optimum colour consistency—3 step MacAdam ellipse tolerance
- > Average rated LED life: >50,000hrs (L90/B50)
- > Photobiological hazard: RG0




## PERFORMANCE

Light source	LED
Distribution	Symmetrical
Luminaire output	600 - 1450lm
Luminaire efficiency	≥77lm/W
CRI	>80


## MATERIALS

Body	Zinc-plated steel
Finish	Graphite grey (RAL 7016)
Diffuser	Opal polycarbonate TP(a)
External fixings	M6 stainless steel tamper-proof screws
Wiring	1 x Ø20.5mm rear side cable entry



## OPTIONS

- > White finish (RAL 9003)
- > 316L stainless steel version for marine environments

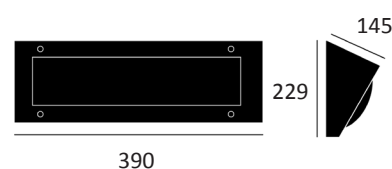

LAMP	COLOUR TEMP	DELIVERED LUMENS	STANDARD	DALI	EMERGENCY	
					STANDARD	DALI
8W	3000K	600lm	72000101	72000103	72000191	72000193
8W	4000K	650lm	72000201	72000203	72000291	72000293
17W	3000K	1350lm	72000301	72000303	72000391	72000393
17W	4000K	1450lm	72000401	72000403	72000491	72000493